

A stack of four leather samples in different colors: dark blue, dark grey, light tan, and off-white. The samples are rolled up, showing the texture and thickness of the leather. The background is a plain, light color.

# EUROSOFT

---


A beautiful soft European leather with a high degree of durability

INSTYLE

# EUROSOFT




EUROSOFT Daintree




EUROSOFT Cielo



EUROSOFT Veneto




EUROSOFT White




EUROSOFT Molsa




EUROSOFT Clematis




EUROSOFT Cloudstreet




EUROSOFT Souffle




EUROSOFT Verde




EUROSOFT Viola




EUROSOFT Anvil




EUROSOFT La Mer




EUROSOFT Vino Rosso




EUROSOFT Thunder



EUROSOFT Marina




EUROSOFT Rubus




EUROSOFT Black

Leather may vary in colour due to the nature of the media  
Please refer to website for current colour range


# EUROSOFT



EUROSOFT Raffia



EUROSOFT Ochre



EUROSOFT Halloween



EUROSOFT Basalt




EUROSOFT Mayfair




EUROSOFT Casaba



EUROSOFT Stalk




EUROSOFT Arid




EUROSOFT Rooster



EUROSOFT Caramello




EUROSOFT Ferre




EUROSOFT Helena



EUROSOFT Sand




EUROSOFT Baci



EUROSOFT Campari

Leather may vary in colour due to the nature of the media  
Please refer to website for current colour range

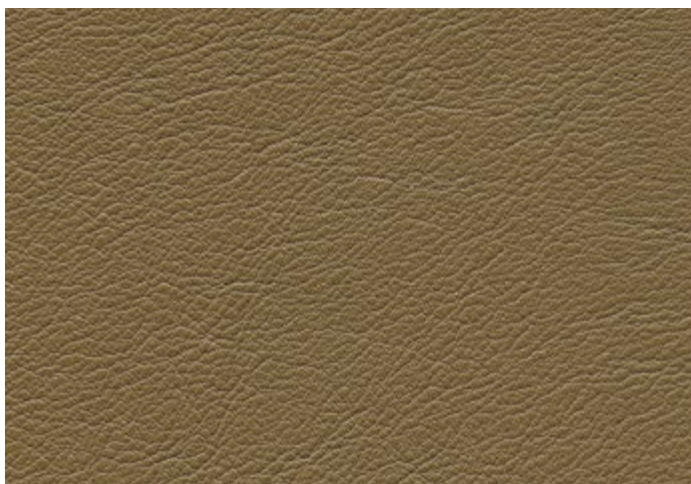

DESCRIPTION	A beautiful soft European leather with a high degree of durability	
AVERAGE HIDE SIZE	5.5sqm	
THICKNESS	1 - 1.2mm	
WEIGHT	880gsm	
LEATHER TYPE	Semi-Aniline 	
COLOURFASTNESS TO-AND-FRO RUBBING EN ISO 11640 + 11641	Dry 5 Wet 4 Perspiration 3-4	
LIGHTFASTNESS EN ISO 105-B02	≥ 4	
FINISH ADHESION EN ISO 11644	4.9 (N/10mm)	
pH AND ΔpH EN ISO 4045	pH 3.9 ΔpH 0.4	
TEAR STRENGTH EN ISO 3377-1	45 N	
FIRE RATINGS AS/NZS 1530.3	Ignitability	13
	Spread of Flame	0
	Heat Evolved	3
	Smoke Developed	6
AS/NZS 3837 (AS 5637.1)	BCA Group 1	
	Av. Specific Extinction Area	32.8m <sup>2</sup> /kg
ISO 5660.1	NZBC Group 1	
APPLICATION	Upholstery for commercial, residential and hospitality	

#### PLEASE NOTE

- Sourced from high quality raw hides, Semi-Aniline leathers have a natural grain and an invisible water-based protective coating that ensures the leather is suitable for the most demanding situations while maintaining a very soft handle. A very fine pigment is applied to its surface thus increasing the leather's resistance to colour change that is caused by exposure to sunlight.
- Results from performance tests are guidelines only.

#### CARE

- Leather Care for Finished Leathers is available from our website

#### ENVIRONMENT

- Leather is an agricultural by-product
- Tannery operates an Environmental Management System, has reduced energy and water use and uses 30% less water than the industry average. 15% of the tannery's energy is renewable, sourced from the sun and wind. All by-products are reused or recycled
- Certified as low-VOC
- Reusable

#### GREEN STAR

- EUROSOFT can contribute low VOC points
- EUROSOFT can be used on white furniture certified to Ecospecifier, AFRDI, ECNZ and GECA
- The Green Star Rating Tool states "Where at least 90% of an item's mass is certified to a GBCA recognised standard, the item can be entered as a certified product at Level A, B or C." Therefore any leather can be used as leathers are almost always under 10% by weight of a furniture item

#### LEED

- EUROSOFT can contribute low VOC points

#### WELL

- EUROSOFT can contribute to Low VOC / VOC Reduction
- Toxic Material Reduction: EUROSOFT is free of PFCs, flame retardants, phthalates and urea formaldehyde

#### SEATING COMFORT RATING



A rating to determine a leather's seating comfort based upon the leather's ability to breathe and absorb moisture. Tested to ASTM E 96 M-05. EUROSOFT achieves a Good Seating Comfort rating.