


Ecooustic® Axis


—
An acoustic panel with an elegant
large-scale linear design



Colours

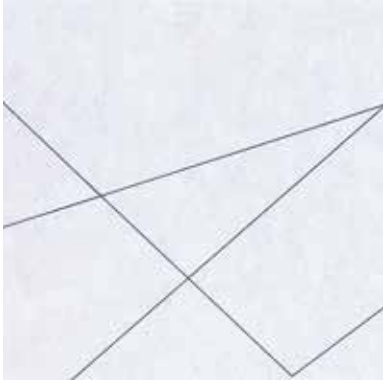


AXIS Flint on Opal

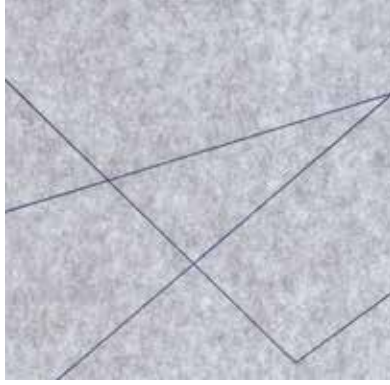

AXIS Navy on Light Grey



AXIS White on Pewter

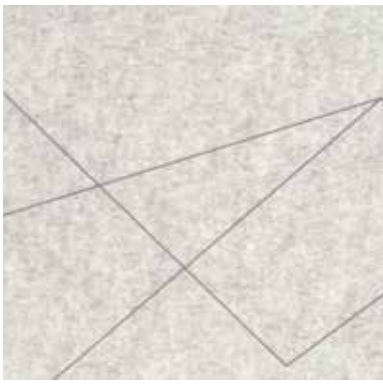


AXIS Putty on Natural



AXIS Neon on Taupe



AXIS Ghost on Charcoal

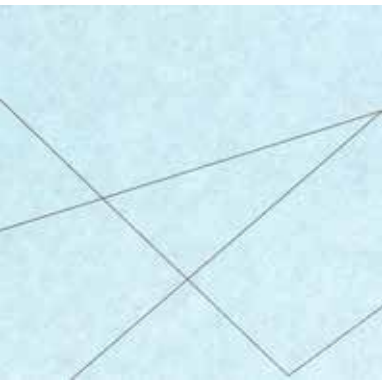


AXIS Putty on Spray



AXIS Blush on Indigo

Patterns shown are not to scale
Product may vary in colour due to the nature of the media
Please refer to website for current colour range

Ecoustic® Axis

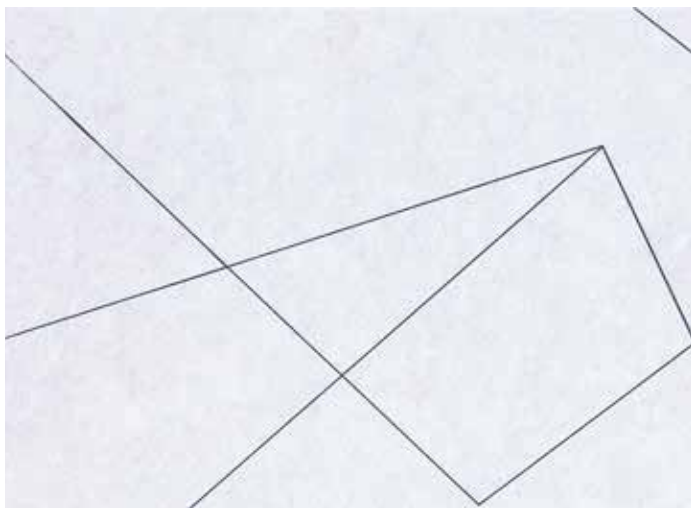

COMPOSITION	100% PET (up to 65% recycled PET)
THICKNESS	8mm + 25mm (stock item) 13.5mm*, 50mm* + 12mm Screen*
PRINT DIMENSIONS	Panel: 1200 x 2700mm approx. Screen: 2400 x 1200mm approx.
PATTERN REPEAT	H: 1200mm V: 2700mm Axis is railroaded for Ecoustic® Screen
FIRE RATINGS	AS/NZS 1530.3 AS/ISO 9705 NCC BCA Group 1 NZBC Group 1-S GB 8624-2012 Grade B1 (8mm Panel) Refer to specific Ecoustic® Panel + Screen information
ACOUSTIC AS/ISO 354	α_w 0.34 - 1.0 / NRC 0.3 - 1.0 Depending on panel thickness, refer to specific Ecoustic® Panel + Screen information
APPLICATION	screen, wall + ceiling panel
ORIGIN	Made in Australia
EDGING	Natural anodised aluminium edging are available for all Ecoustic® Panel thicknesses + T Trims in natural anodised or black powdercoat
PLEASE NOTE	Onsite trimming to square each individual panel is essential. This is a hand printed product. Variation in thickness, fibre mix and colour as well as flecks and other slight surface blemishes are an inherent feature of this product and are unavoidable. Variation from batch to batch may occur. Results from performance tests are guidelines only.

BENEFITS

Improved Pinability: Ecoustic® Panel + Screen features an improved pinability compared to similar panel products.

Lightweight, Easy to Handle + Install: Ecoustic® is an intelligent alternative to traditional panels composed of multiple materials such as particle board, fabric, foam and adhesive.

Designed for the Environment

- Based on low energy manufacturing
- 100% polyester (up to 65% PC + PI recycled content)
- Designed for disassembly + recyclable
- Low-VOC, EPD + Greentag Level A Certified

Building Rating Systems: Ecoustic® Axis will contribute the following points for Green Star, LEED + WELL building standards.

Criteria	Green Star	LEED	WELL
Recycled Content	√	√	NA
Low VOC	√	√	√
Recycling Program	√	√	NA
EPD	√	√	NA
Third Party Greentag Level A Certification	√	√	√
Toxic Material Reduction	NA	NA	√
Sound Reducing Surfaces 25mm + 50mm	NA	NA	√


HOW TO SPECIFY

DESIGN	Ecoustic® Axis
PRODUCT	Panel (Single Side) or 12mm Screen* (Double Side)
PANEL THICKNESS	8mm, 13.5mm*, 25mm or 50mm*
COLOUR	Select from Axis colours
EDGING	Optional extra - order separately

*minimums apply

Acoustic Performance

The sound absorption has been tested in accordance with AS/ISO 354. For complete test reports please contact your local distributor.

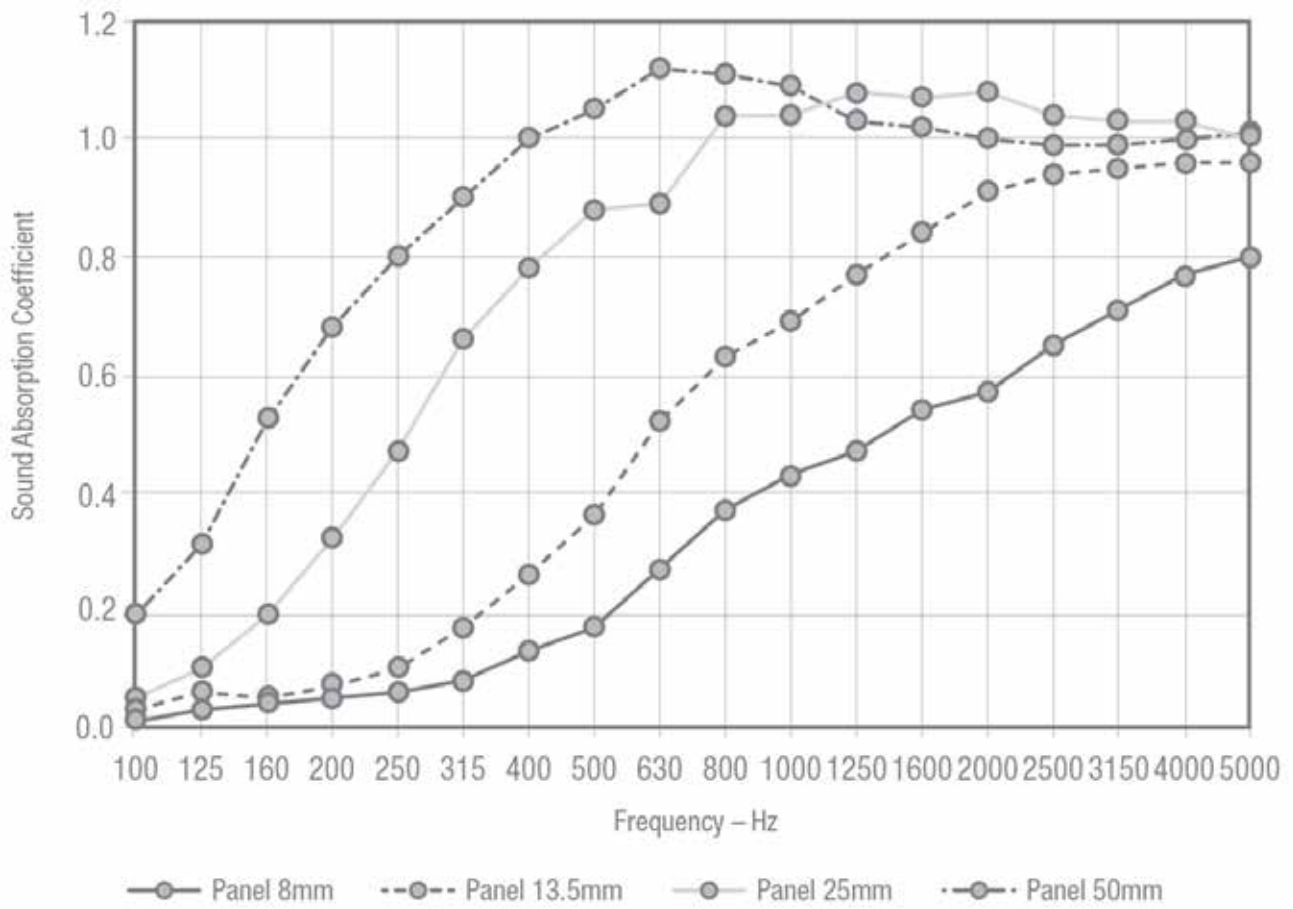

Single Panel Pattern Repeat

