


# Ecoustic® Meta


—  
A striking acoustic panel print designed  
by Michael Young




# Colours

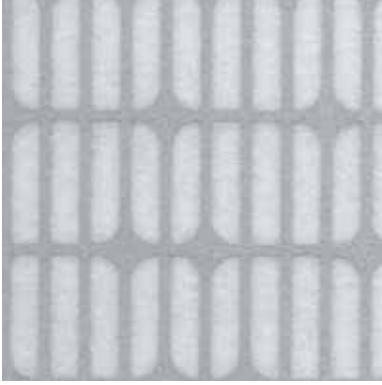


META Ash on White

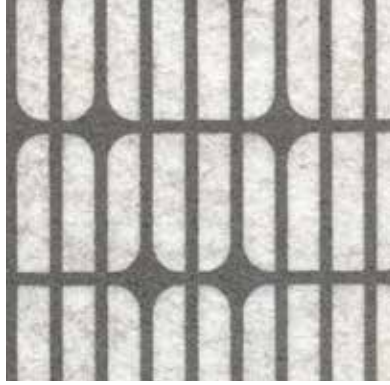


META Stone on Natural

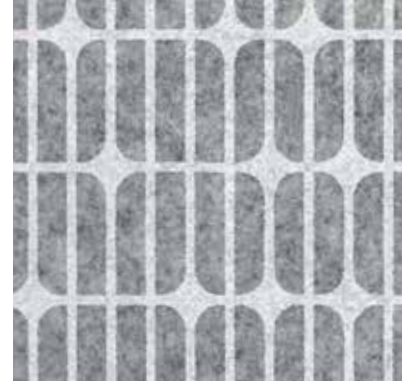

META White on Light Grey

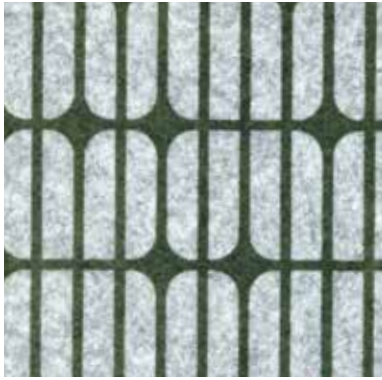

META Olive on Light Grey

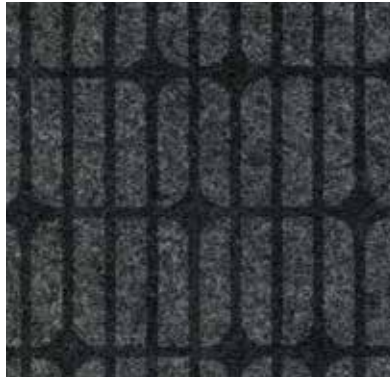

META Black on Charcoal

Patterns shown are not to scale  
Product may vary in colour due to the nature of the media  
Please refer to website for current colour range

# Ecoustic® Meta



COMPOSITION	100% PET (up to 65% recycled PET)
THICKNESS	8mm + 25mm (stock item) 13.5mm*, 50mm* + 12mm Screen*
PRINT DIMENSIONS	Panel: 1190 x 2700mm approx. Screen: 2400 x 1200mm approx.
PATTERN REPEAT	H: 600mm V: 588mm META is railroaded for Ecoustic® Screen
LIGHTFASTNESS ISO 105-B02	> 6
FIRE RATINGS	AS/NZS 1530.3 AS/ISO 9705 Group 1-S GB 8624-2012 Grade B1 (8mm Panel) Refer to specific Ecoustic® Panel + Screen information
ACOUSTIC AS/ISO 354	$\alpha_w$ 0.34 - 1.0 / NRC 0.30 - 1.0 Depending on thickness, refer to specific Ecoustic® Panel + Screen information
APPLICATION	screen, wall + ceiling panel
ORIGIN	Made in Australia
EDGING	Natural anodised aluminium edging are available for all Ecoustic® Panel thicknesses + T Trims in natural anodised or black powdercoat
PLEASE NOTE	Results from performance tests are guidelines only. Onsite trimming to square each individual panel is essential. This is a hand printed product. Variation in thickness, fibre mix and colour as well as flecks and other slight surface blemishes are an inherent feature of this product and are unavoidable. Variation from batch to batch may occur.

## BENEFITS

**Improved Pinability:** Ecoustic® features an improved pinability compared to similar panel products.

**Lightweight, Easy to Handle + Install:** Ecoustic® is an intelligent alternative to traditional panels composed of multiple materials such as particle board, fabric, foam and adhesive.

### Designed for the Environment

- Based on low energy manufacturing
- 100% polyester (up to 65% PC + PI recycled content)
- Designed for disassembly + recyclable
- Low-VOC, EPD + Greentag Level A Certified

**Building Rating Systems:** Ecoustic® Meta will contribute the following points for Green Star, LEED + WELL building standards.

Criteria	Green Star	LEED	WELL
Recycled Content	√	√	NA
Low VOC	√	√	√
Recycling Program	√	√	NA
EPD	√	√	NA
Third Party Greentag Level A Certification	√	√	√
Toxic Material Reduction	NA	NA	√
Sound Reducing Surfaces 25mm + 50mm	NA	NA	√

## HOW TO SPECIFY

DESIGN	Ecoustic® Meta
PRODUCT	Panel (Single Side) or 12mm Screen* (Double Side)
PANEL THICKNESS	8mm, 13.5mm*, 25mm or 50mm* *minimums apply
COLOUR	Select from Meta colours
EDGING	Optional extra - order separately

\*minimums apply

# Acoustic Performance

The sound absorption has been tested in accordance with AS/ISO 354. For complete test reports please contact your local distributor.

