

MANDALAY

A versatile high performance
wallcovering with an
understated natural texture



INSTYLE

MANDALAY




Rice J300



Quartz J301



Mist J302

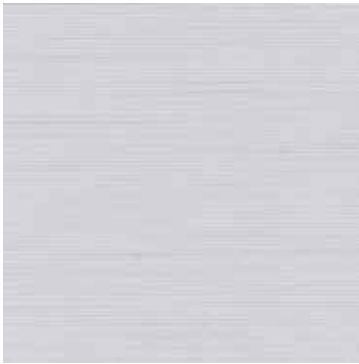

Cloud J309



Ash J310



Peppercorn J311



Cayenne J314



Bilberry J313



Fern J312

Patterns shown are not to scale
Product may vary in colour due to the nature of the media
Please refer to website for current colour range



| | |
|---|--|
| FACE COMPOSITION | vinyl (PVC) |
| BACKING TYPE | polyester nonwoven |
| WIDTH | 137cm |
| WEIGHT | 452gsm / 620g lineal m |
| PATTERN REPEAT | non-match |
| ROLL SIZE | 27.4m approx. Note: minimum order quantity is 10.9m and 0.9m multiples |
| PERFORMANCE | Type II Wallcovering Ideal for high traffic environments |
| FIRE RATING AS/NZS 3837 AS 5637.1 | BCA Group 2 Av. Specific Extinction Area 51.3 m2/kg |
| ISO 5660.1 | NZBC Group 2S Av. Specific Extinction Area 5.2 m2/kg |
| Additional Fire Tests | ASTM E-84 Tunnel Test Class A |
| ENVIRONMENT | Low VOC Phthalate free |

PRODUCT INSTALLATION

- Please refer to installation instructions for MANDALAY supplied with each shipment. A copy is also available on our website.
- All material must be installed in numerical sequence as cut from the roll.

CARE + MAINTENANCE

- General maintenance can be achieved with periodic dusting or vacuuming with a soft brush attachment.
- Remove ordinary dirt and smudges with a mild soap and warm water solution. Always test the solution on an inconspicuous portion of the wallcovering before proceeding, checking that there is no adverse effect on finish, colour or gloss. Care should be taken on dark colours due to the possibility of causing 'light marks'. Always use a blotting action rather than rubbing to avoid abrasion. Rinse thoroughly with clean water from the top down using a sponge.
- Deeply embossed wallcoverings need extra attention in case suds or loosened dirt lodge in depressed surfaces.
- Dry wallcovering with a soft lint free cloth or towel.
- Please refer to the MANDALAY care and maintenance instructions for further details. A copy is available on our website or obtained by contacting your nearest office or agent.

WARRANTY

- For a period of 3 years from date of invoice this wallcovering is guaranteed to be first quality and free of manufacturing defects. This warranty applies only to professionally applied installations according to the recommended installation instructions, and proper care and maintenance using appropriate cleaning agents as outlined in the care and maintenance instructions.