


SCULPT™ PARALLEL TILE INSTALLATION


These instructions apply to all Sculpt™ Parallel designs such as Classic, Cove, Custom, Diamond, Peak, Quadrant, Ridge, Steps, Taper, Tide + Zig

Supplied

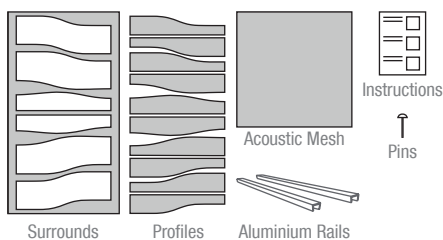


		600 Tile	1200 Tile
Tiles	12mm	8	4
	24mm	4	2
Acoustic Mesh	12mm	8	4
	24mm	4	2
Aluminium Rails	12mm	16	8
	24mm	8	4
Pins	12mm	32	24
	24mm	24	24

NB. Component qty's above are doubled for Classic Shallow

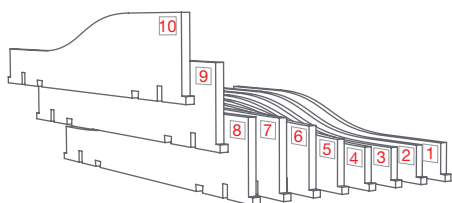



Note

To achieve a mirrored pattern, the order of the sequence **must be reversed** on tiles as required to achieve desired result. Refer to the Reflected Ceiling Plan.

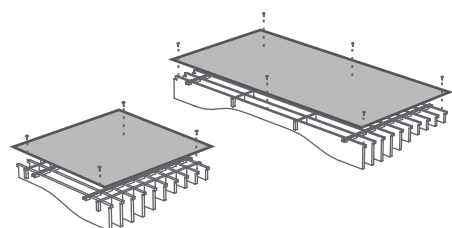


Step 5

Turn assembly over and attach the acoustic mesh to the back of the tile using the pins provided. Note: Pins should be placed close to midpoints and corners.

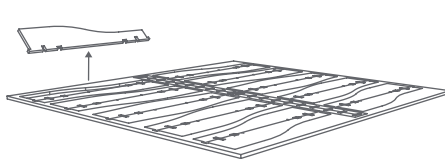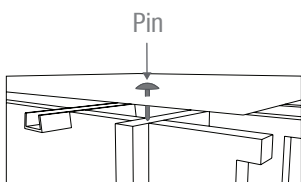


Step 1

Remove profiles from their protective surround.

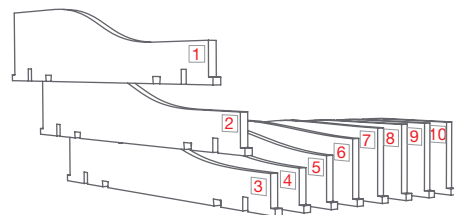


Step 2

Arrange the profiles in sequence using the removable numbers and letters applied to each profile.

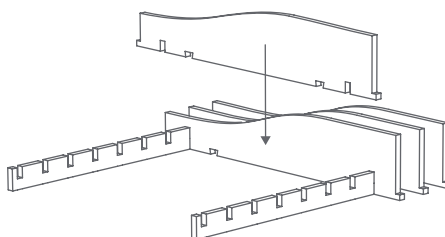


Step 3

Push the profiles into the two combs.

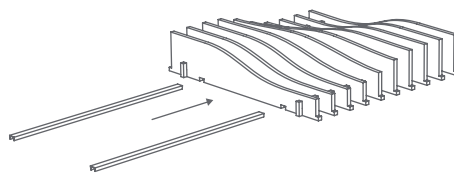


Step 4

Slide the two aluminium rails through all profiles using the slots provided. Remove labels.

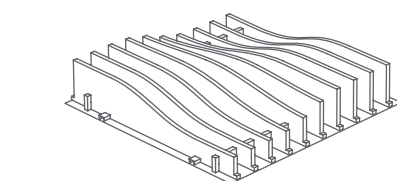

The assembled ceiling tile is complete.




Ceiling Grid Installation

Tile edge notch and tab profiles are designed to capture either 15mm or 24mm ceiling grid profiles. Tiles can be fitted and removed from ceiling grids quickly to access services above.


SCULPT™ NETWORK INSTALLATION

Supplied


600 / 1200 Tile

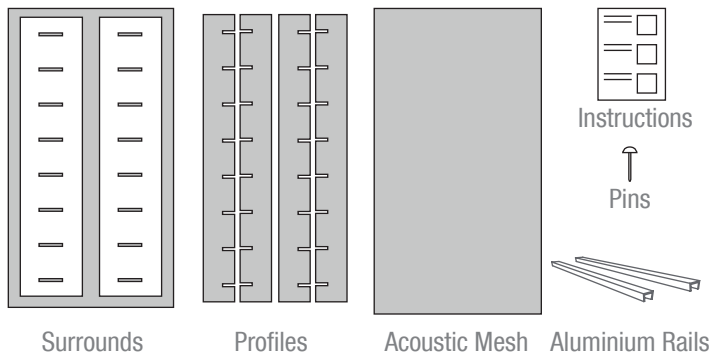


		Network Shallow		Network Deep	
		600 Tile	1200 Tile	600 Tile	1200 Tile
Tiles	12mm	16	8	8	4
	24mm	8	4	4	2
Acoustic Mesh	12mm	16	8	8	4
	24mm	8	4	4	2
Aluminium Rails	12mm	32	16	16	8
	24mm	16	8	8	4
Pins	12mm	64	48	32	24
	24mm	32	24	24	24

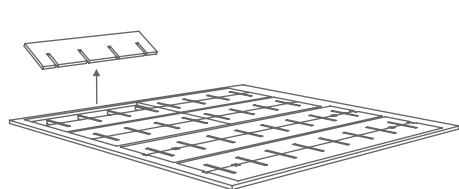


Step 1
Remove profiles from their protective surround.

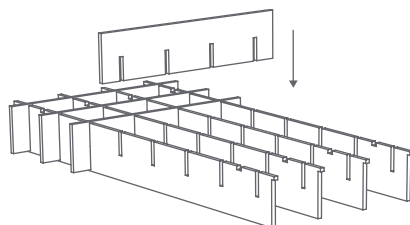


Step 2
Push the shorter profiles into the longer profiles.

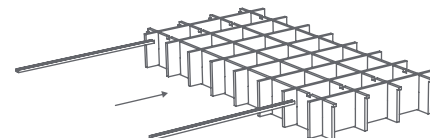


Step 3
Slide the two aluminium rails through all 4 longer profiles using the slots provided. Remove labels.

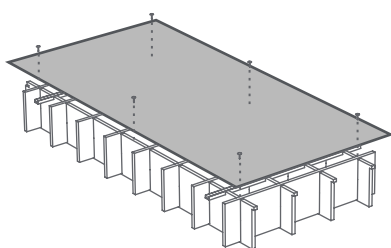


Step 4
Turn assembly over and attach the acoustic mesh to the back of the tile using the pins provided. Note: Pins should be placed close to midpoints and corners.

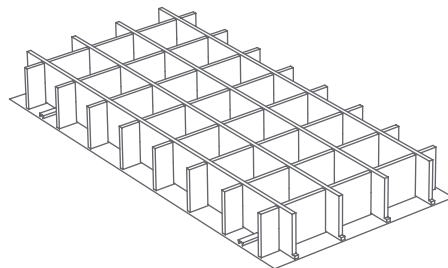

The assembled ceiling tile is complete.

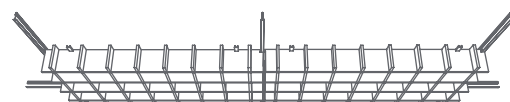


Ceiling Grid Installation
Tile edge notch and tab profiles are designed to capture either 15mm or 24mm ceiling grid profiles. Tiles can be fitted and removed from ceiling grids quickly to access services above.

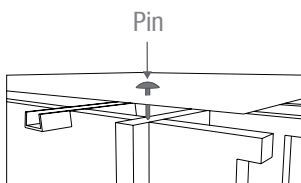


SCULPT™ MOD INSTALLATION


Supplied

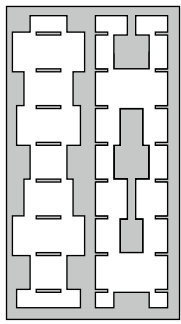

Surrounds x 8

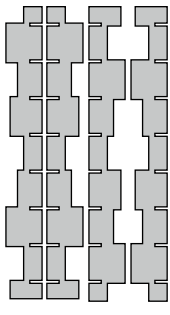


Profiles x 48



Acoustic Mesh
x 4



Instructions



Pins x 24




Aluminium Rails
x 8

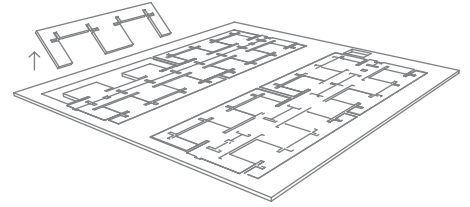

Step 1



Remove profiles from their protective surround.

Please note there are 2 x large profile shapes, and 2 x small profile shapes.

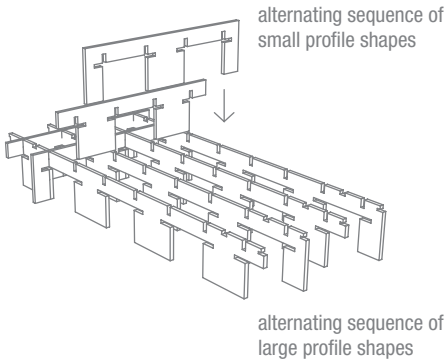

alternating sequence of
small profile shapes

alternating sequence of
large profile shapes

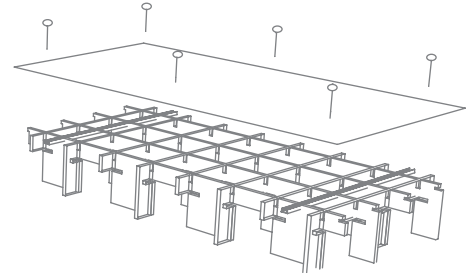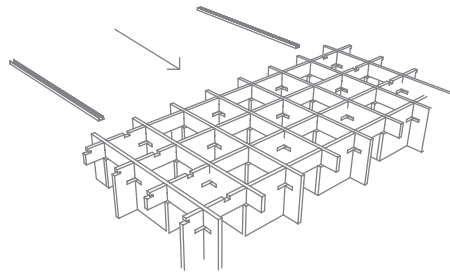

Step 2


Push the 8 smaller profiles into the four longer profiles, in alternating sequence of the large and small profile shapes.

Step 3


Slide the two metal rails through all 4 large profiles using the slots provided.

Step 4

Turn assembly over and attach the acoustic mesh to the back of the tile using the pins provided. (NOTE: Each pin should be placed at the intersection of two profiles).


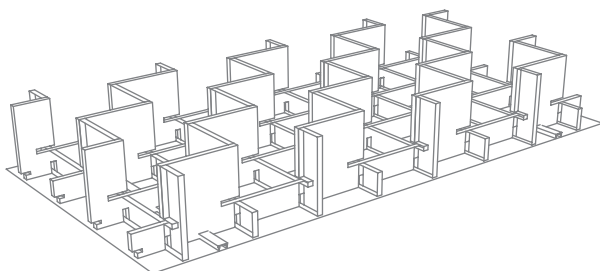


The assembled ceiling tile is complete.



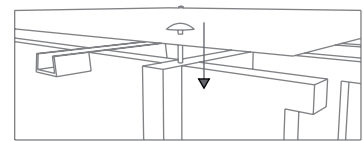


SCULPT™ ICON INSTALLATION

Supplied

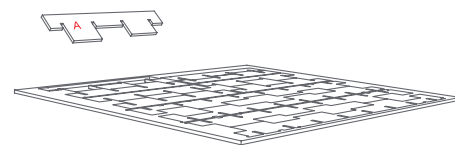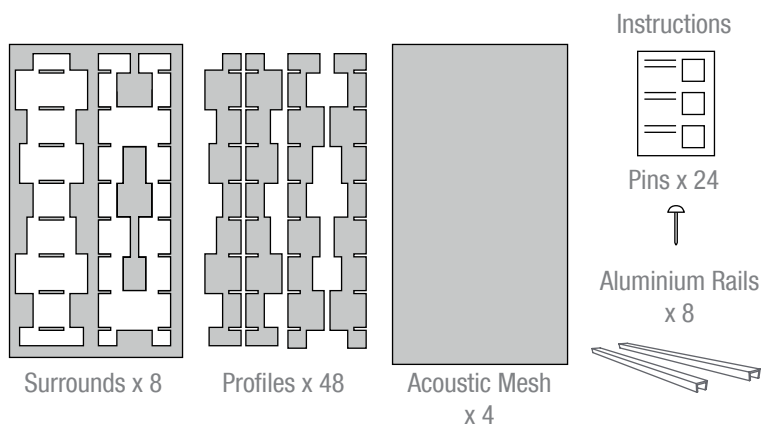



Step 1
Remove profiles from their protective surround.

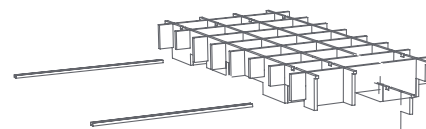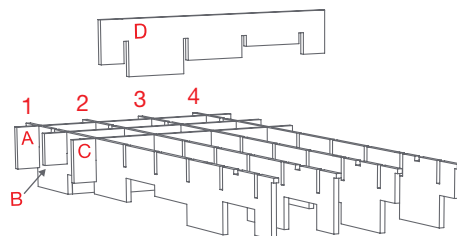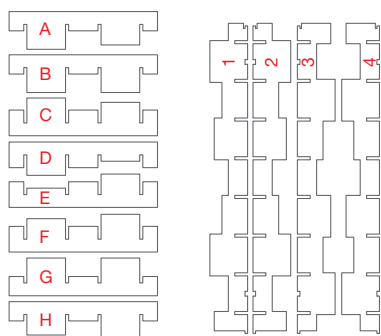

Step 2
Arrange profiles in sequence using the numbers + letters applied to each profile before pushing the 8 shorter profiles into the 4 longer profiles.
Start with profile A and profile 1 on the same corner.

Step 3
Reference numbers + letters 1, 3, B, E + H will be displayed on reverse face of the assembled profile, compared with other profiles.


Step 4
Slide the two aluminium rails through the four longer profiles using the slots provided. Remove labels.

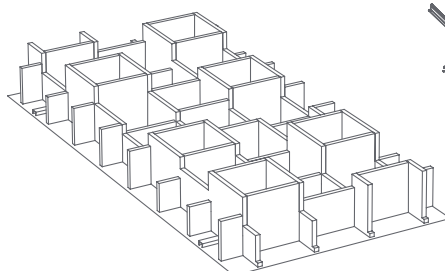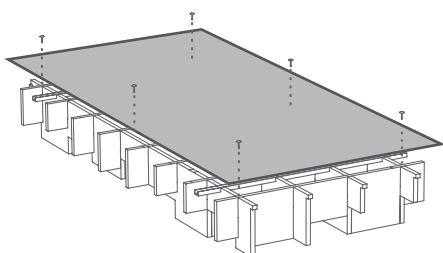

Step 5
Attach the acoustic mesh to the back of the tile using the pins provided. Note: Pins should be placed close to midpoints and corners.

The assembled ceiling tile is complete.

Ceiling Grid Installation
Tile edge notch and tab profiles are designed to capture either 15mm or 24mm ceiling grid profiles. Tiles can be fitted and removed from ceiling grids quickly to access services above.

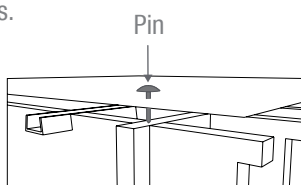

ECOUSTIC SCULPT™ CARE

Regular Care

- Protect from direct heat and sunlight
- To prevent dust build up, lightly dust with a soft cloth or vacuum with a soft brush attachment

Cleaning

- Professional cleaning is always recommended
- Always test any any cleaning products on an inconspicuous area prior to commencing cleaning
- Blot any excess spills from the material with a dry clean sponge or cloth
- Treat all stains and spills as soon as possible
- Most marks can be spot cleaned by lightly wetting the affected area with a mild detergent and warm water solution
- Do not saturate the tile
- Do not scrub or abrade the surface as this will affect the surface finish
- Once the stain or mark has been loosened then blot the excess solution out with a dry clean sponge or cloth
- Sponge afterwards with clean warm water and dry any excess moisture with a dry clean sponge or cloth
- The product can also be spot cleaned with dry cleaning fluid, lightly sponge a small amount of dry cleaning fluid and blot
- Dry away from direct heat and sunlight
- Do not use carpet shampoo