


ORBIT



Patterns shown are not to scale Product may vary in colour due to the nature of the media Please refer to website for current colour range


ORBIT

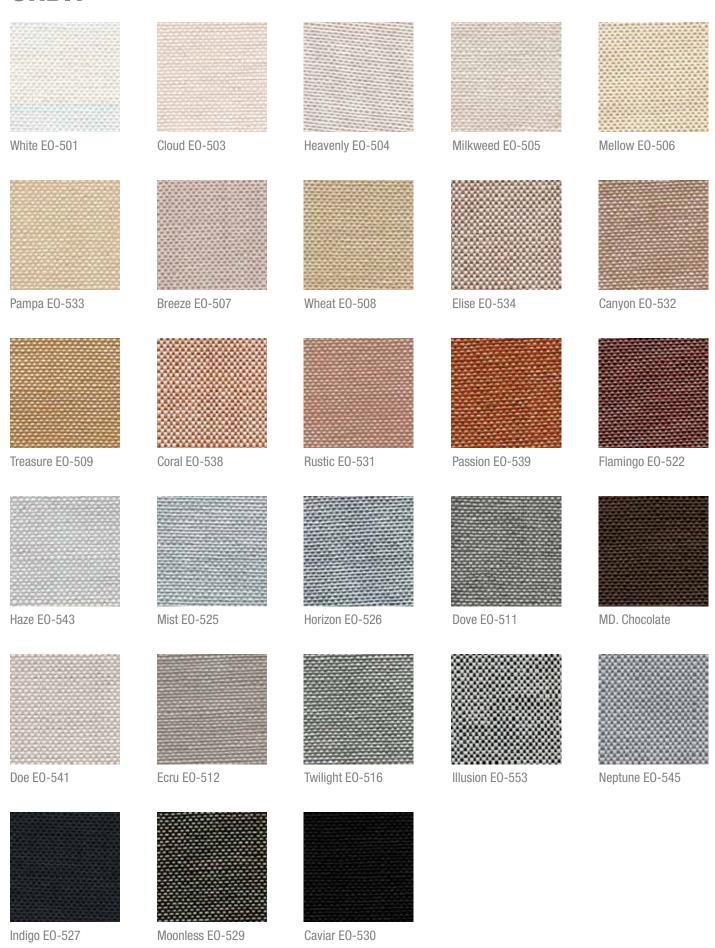



Travertine E0-542

High Performance Wallcoverings

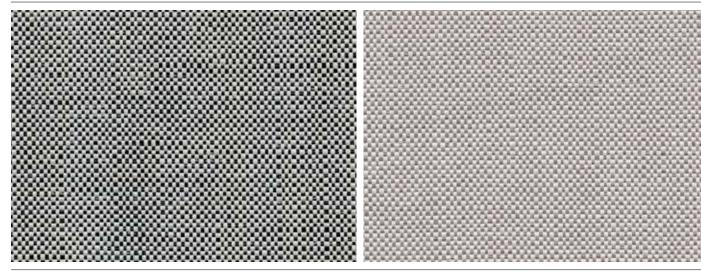

COMPOSITION polyethylene and acrylic backcoating

WIDTH 137cm

WEIGHT 407gsm / 558g lineal m

PATTERN REPEAT non-match

ROLL SIZE 36m approx. Note: minimum order

quantity is 10.9m and 0.9m multiples

PERFORMANCE Type II Wallcovering

Additional Fire Tests ASTM E-84 (adhered) Tunnel Test

Class A

CA Bulletin 117 (Class 1) UFAC / NFPA-260 (Class 1)

ENVIRONMENT

- PVC-free, polyethylene based
- ORBIT is free of phthalates and heavy metals
- Low VOC

PRODUCT INSTALLATION

- Please refer to installation instructions for ORBIT, a copy is supplied with each shipment and available on our website.
- All material must be installed in numerical sequence as cut from the roll.

CARE + MAINTENANCE

- Care must be taken not to damage or mark the surface due to abrasion / rubbing.
- General maintenance can be achieved with periodic dusting or vacuuming with a soft brush attachment.
- Remove ordinary dirt and smudges with a mild soap and warm water solution.
- Always test the solution on an inconspicuous portion of the wallcovering before proceeding, checking that there is no adverse effect on finish, colour or gloss.
- Care should be taken on dark colours due to the possibility of causing 'light marks'. Always use a blotting action rather than rubbing to avoid abrasion.
- Rinse thoroughly with clean water from the top down using a spange
- Dry with a soft lint free cloth or towel.
- Avoid alcohol / solvent based cleaners.
- ORBIT care and maintenance instructions are available on our website.

WARRANTY

For a period of 3 years from date of invoice this wallcovering
is guaranteed to be first quality and free of manufacturing
defects. This warranty applies only to professionally applied
installations according to the recommended installation
instructions, and proper care and maintenance using
appropriate cleaning agents as outlined in the care and
maintenance instructions.







