
## SWITCH

A high performance vinyl with a contemporary linear texture

YLE

## **SWITCH - ADF Vinyl**

## **High Performance - Healthcare**

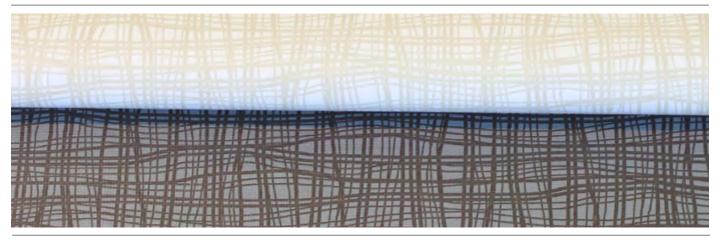

COMPOSITION	85% PVC, 15% polyester + Resilience	PERFORMANCE
WIDTH / ROLL SIZE	137cm / 27.4m approx	<ul> <li>Permanent Stain Protection: The Resilience finish guards against most stains. Most stains can simply be wiped away using mild soap and water</li> <li>Waterproof + Water Resistant</li> <li>Abrasion Resistance: Resilience provides additional wear properties and surface durability, thereby increasing the life of the material. SWITCH is able to withstand wear and tear in high demanding situations</li> <li>Easy to Clean + Bleach Cleanable: Easily cleaned with mild soap and water. Can be easily disinfected using one part bleach and ten parts water</li> <li>Superior Lightfastness: Achieves 500 hours light fastness</li> </ul>
WEIGHT	639gsm	
PATTERN REPEAT	H 26.7cm V 25.4cm	
CARE CODE	V1	
ABRASION Martindale AS2001.2.25 Wyzenbeek ASTM 4157	>100,000 >350,000	
LIGHTFASTNESS ISO 105-B02	>6	
TEARING FORCE AS2001.2.10	Length 87.5N Width 44N	<ul> <li>Free of phthalates, flame retardant + anti-bacterial additives</li> </ul>
UV RESISTANCE AATCC 16-2004, Option 3	>500 hours	<ul> <li>Thee of philalates, hame retardant + anti-bacterial additives (ADF); lead, BPA, TRIS + formaldehyde</li> <li>Does not contain conflict minerals</li> <li>Reduced energy and water use, recycling of waste + solution-dyed product</li> <li>Meets the environmental, health and safety standards set by California Prop 65, CPSIA + REACH</li> </ul>
ADDITIONAL RESULTS	Blocking Resistance AS4878.11 Resistance to Flex Cracking AS4878.9 Tensile Strength AS4878.6 Elongation + Stretch Set AS1441.9 Loss of Plasticiser AS1441.8	
FIRE RATINGS AS/NZS 1530.3 Additional Fire Tests	Ignitability16Spread of Flame0Heat Evolved1Smoke Developed5MVSS 302, NFPA 260	<ul> <li>SWITCH can be used on white furniture certified to Ecospecifier, AFRDI, ECNZ and GECA.</li> <li>The Green Star Rating Tool states "Where at least 90% of an item's mass is certified to a GBCA recognised standard, the item can be entered as a certified product at Level A, B or C." Therefore any fabric can be used as fabrics are almost always under 10% by weight of a furniture item.</li> </ul>
	California Bulletin 117 E	
APPLICATION	Indoor upholstery, banquette seating, bedheads, screens for healthcare, hospitality, office, public building, education, automotive + residential	<ul> <li>WELL</li> <li>SWITCH can contribute to WELL Toxic Material Reduction criterion as it is free of PFCs, flame retardants, phthalates and urea formaldehyde</li> </ul>
PLEASE NOTE	Results from performance tests are guidelines only	

## INSTY