

# Ecoustic® Dangaay Trimming Guidelines

- The Dangaay print does not extend to panel edges
- An unprinted border occurs on all four sides
- The panels need to be trimmed before installation with or without the use of edging profiles


Please adhere to the following guidelines for trimming:

- Refer to sticker on back of panel for correct design orientation and keep orientation consistent
- Align a straight edge between “+” crop marks on each corner and trim horizontally and vertically
- Approximate dimensions are below for full print size
- Trimming into print area will affect pattern continuity from panel to panel
- Do not use other print registration marks on panels as cutting guides
- Do not measure from panel edge as the print may not be centred within the panel
- Make all measurements and cuts based on print area

Please Note:

- Dangaay is designed to be continuous when trimmed to print edge, panelling will occur at panel to panel joins
- Always check panels side by side for correct orientation and pattern alignment prior to cutting and installing
- Dangaay is hand screen printed, batch to batch colour variation can occur

## Panel

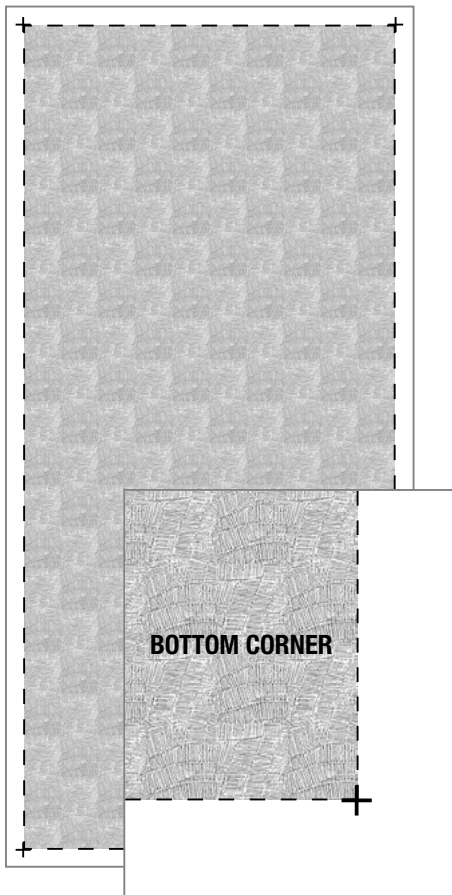

Panel Thickness: 8mm, 13.5mm, 25mm + 50mm

Panel Size: 1210 x 2720mm / 3'11" x 8'11" approx.

Print Size: 1200 x 2700mm / 3'11" x 8'10" approx.

+ Print crop marks  
----- Trimming line