## ecoustic

# **Ecoustic® Disc**

## A timeless acoustic panel print designed by Michael Young



### **Ecoustic® Disc**

#### ecoustic<sup>®</sup>



COMPOSITION	100% PET (up to 65% recycled PET)
THICKNESS	8mm*, 13.5mm*, 25mm*, 50mm* + 12mm Screen*
PRINT DIMENSIONS	Panel: 1204 x 2700mm approx. Screen: 2400 x 1200mm approx.
PATTERN REPEAT	H: 100mm V: 58mm DISC is railroaded for Ecoustic® Screen
FIRE RATINGS	AS/NZS 1530.3 AS/ISO 9705 Group 1 GB 8624-2012 Grade B1 (8mm Panel) Refer to Ecoustic <sup>®</sup> Panel + Screen specification
ACOUSTIC AS/ISO 354	NRC 0.3 - 1.0 / aw 0.34 - 1.0 Depending on panel thickness, refer to Ecoustic® Panel + Screen information
APPLICATION	Screen, wall + ceiling panel
ORIGIN	Made in Australia
EDGING	Natural anodised aluminium edging are available for all Ecoustic <sup>®</sup> Panel thicknesses + T Trims in natural anodised or black powdercoat
PLEASE NOTE	Results from performance tests are guidelines only Onsite trimming to square each individual panel is essential This is a hand printed product. Variation in thickness, fibre mix and colour as well as flecks + other slight surface blemishes are an inherent feature of this product and are unavoidable. Variation from batch to batch may occur Interior products must be protected from direct heat + sunlight
WARRANTY	5 year conditional warranty against manufacturing defects. This applies to internal installation only, outdoor use

will void any warranty

#### **BENEFITS**

**Improved Pinability:** Ecoustic<sup>®</sup> Panel + Screen features an improved pinability compared to similar panel products.

**Lightweight, Easy to Handle + Install:** Ecoustic<sup>®</sup> is an intelligent alternative to traditional panels composed of multiple materials such as particle board, fabric, foam and adhesive.

**Designed for the Environment** 




**Building Rating Systems:** Disc will contribute the following points for Green Star, LEED + WELL building standards.

Criteria	Green Star	LEED	WELL
Recycled Content	√	√	NA
Low VOC	√	√	√
Recycling Program	1		NA
EPD	√	√	NA
Declare Label	NA	√	NA
Greentag Level A Certification			
Toxic Material Reduction	NA	NA	
Sound Reducing Surfaces 25mm + 50mm	NA	NA	$\checkmark$

HOW TO SPECIFY	
DESIGN	Ecoustic <sup>®</sup> Disc
PRODUCT	Panel (Single Side) or 12mm Screen* (Double Side)
PANEL Thickness	8mm*, 13.5mm*, 25mm* or 50mm* *minimums apply
COLOUR	Select from Disc colours
EDGING	Optional extra - order separately

**INSTYLE.COM.AU** 

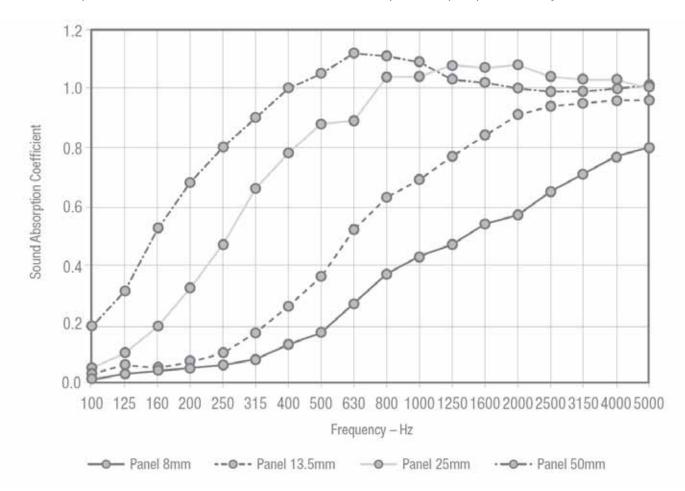

The sound absorption has been tested in accordance with AS/ISO 354. For complete test reports please contact your local distributor.