


Ecooustic® Loop


—

An acoustic panel print designed
by Tom Skeeahan




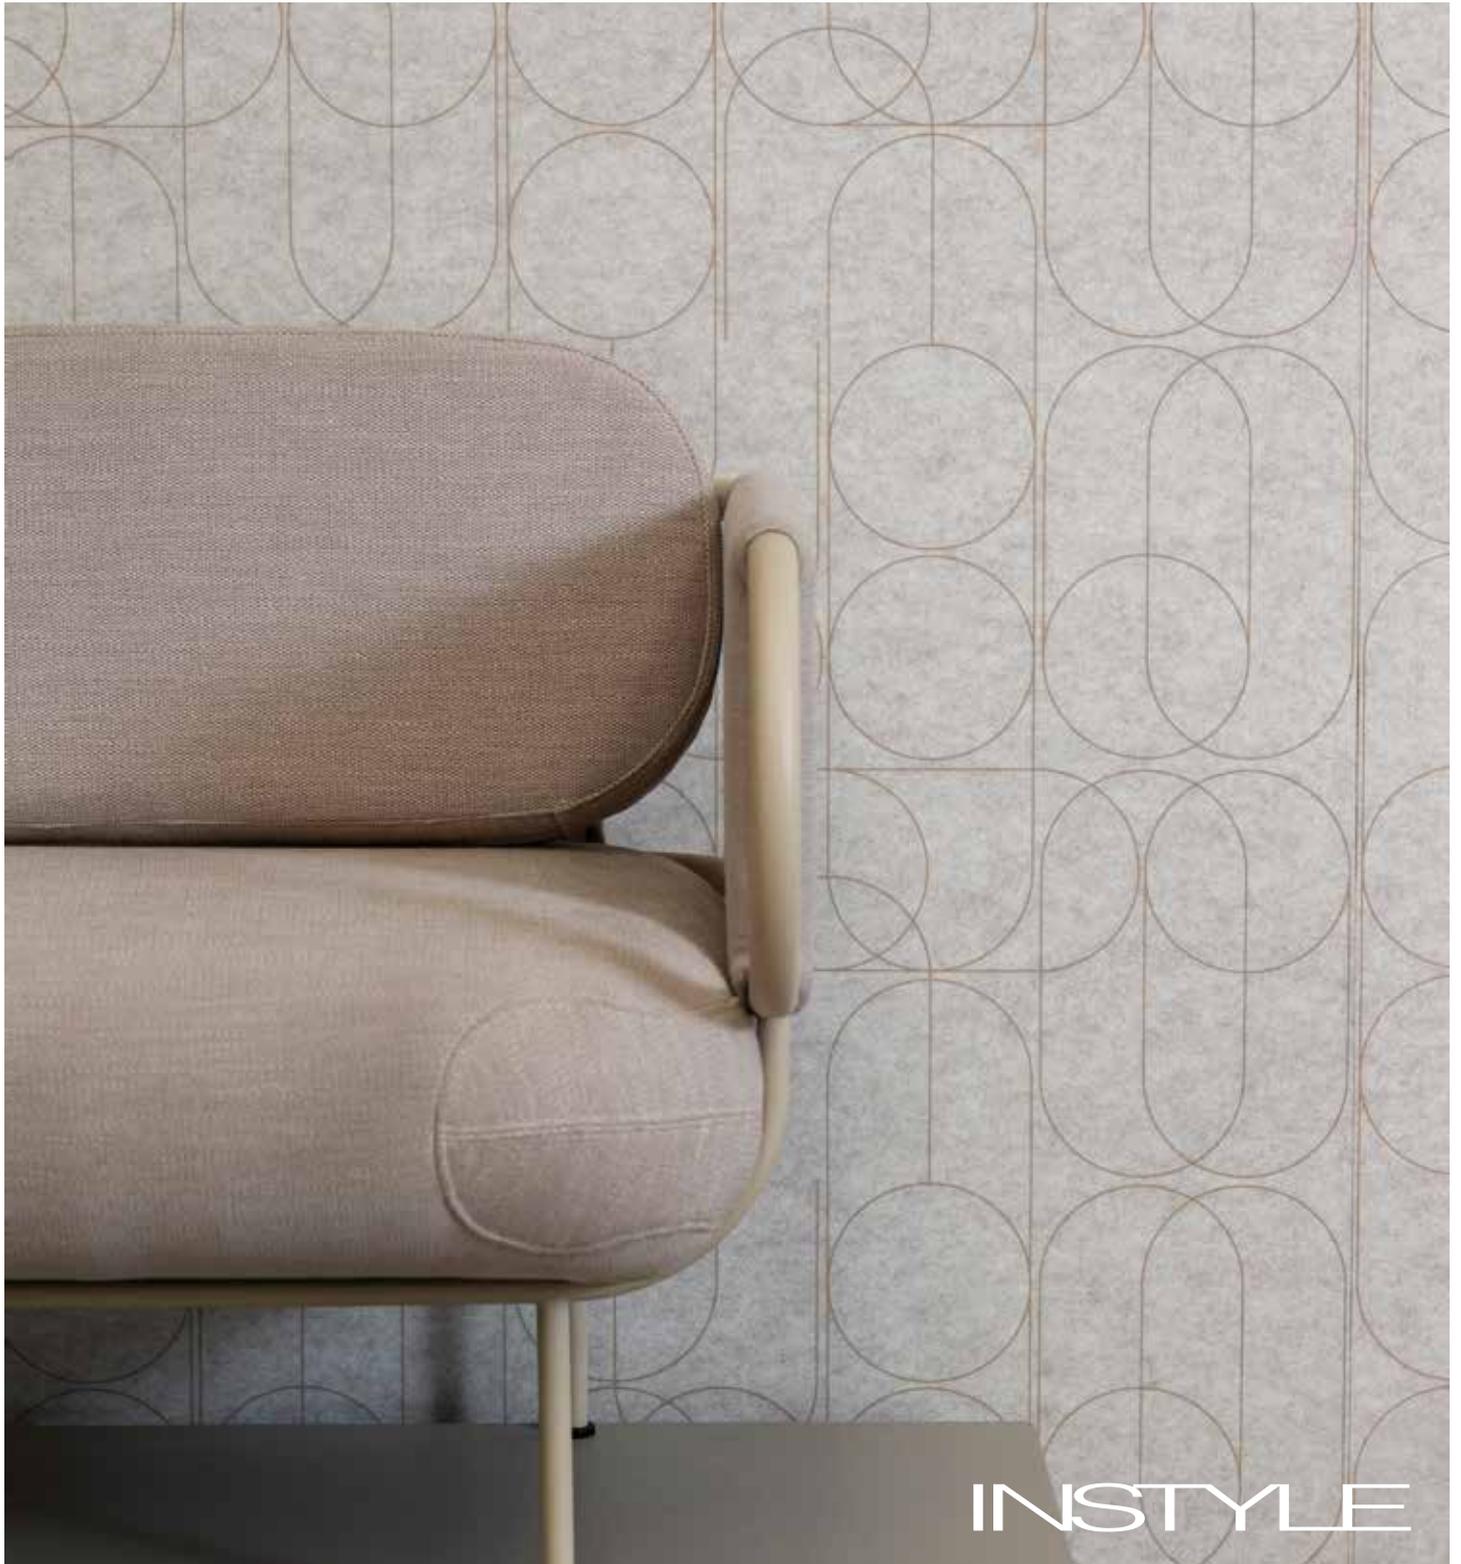


LOOP Ochre on Natural

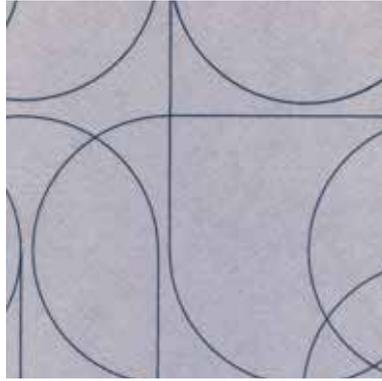


LOOP Petrol on Cameo

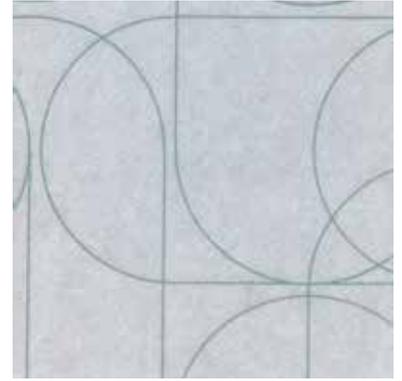


LOOP Mint on Opal

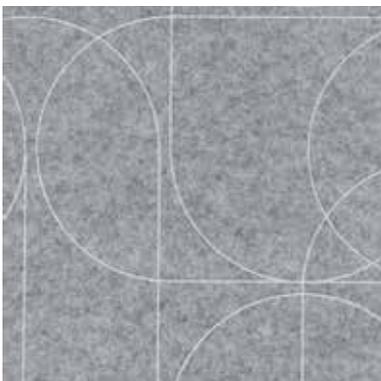

LOOP White on Light Grey

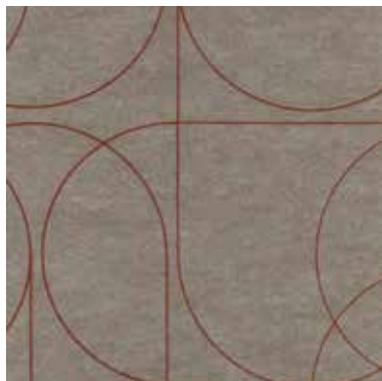

LOOP Rust on Oyster

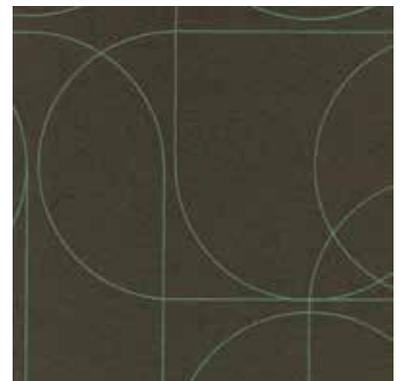

LOOP Mint on Caper

Patterns shown are not to scale
Product may vary in colour due to the nature of the media
Please refer to website for current colour range



| | |
|---------------------|--|
| COMPOSITION | 100% PET (up to 65% recycled PET) |
| THICKNESS | 8mm (stock), 13.5mm*, 25mm*, 50mm* + 12mm Screen* |
| PRINT DIMENSIONS | Panel: 1200 x 2700mm approx. Screen: 2400 x 1200mm approx. |
| PATTERN REPEAT | H: 1200mm V: 2700mm Loop is railroaded for Ecoustic® Screen |
| FIRE RATINGS | AS/NZS 1530.3 AS/ISO 9705 Group 1 GB 8624-2012 Grade B1 (8mm Panel) Refer to Ecoustic® Panel + Screen specification |
| ACOUSTIC AS/ISO 354 | NRC 0.3 - 1.0 / α_w 0.34 - 1.0 Depending on panel thickness, refer to Ecoustic® Panel + Screen information |
| APPLICATION | Screen, wall + ceiling panel |
| ORIGIN | Made in Australia |
| EDGING | Natural anodised aluminium edging are available for all Ecoustic® Panel thicknesses + T Trims in natural anodised or black powdercoat |
| PLEASE NOTE | Results from performance tests are guidelines only Onsite trimming to square each individual panel is essential This is a hand printed product. Variation in thickness, fibre mix and colour as well as flecks + other slight surface blemishes are an inherent feature of this product and are unavoidable. Variation from batch to batch may occur Interior products must be protected from direct heat + sunlight |
| WARRANTY | 5 year conditional warranty against manufacturing defects. This applies to internal installation only, outdoor use will void any warranty |

BENEFITS

Improved Pinability: Ecoustic® Panel + Screen features an improved pinability compared to similar panel products.

Lightweight, Easy to Handle + Install: Ecoustic® is an intelligent alternative to traditional panels composed of multiple materials such as particle board, fabric, foam and adhesive.

Designed for the Environment



Building Rating Systems: Ecoustic® Loop will contribute the following points for Green Star, LEED + WELL building standards.

| Criteria | Green Star | LEED | WELL |
|--|------------|------|------|
| Recycled Content | ✓ | ✓ | NA |
| Low VOC | ✓ | ✓ | ✓ |
| Recycling Program | ✓ | ✓ | NA |
| EPD | ✓ | ✓ | NA |
| Declare Label | NA | ✓ | NA |
| Greentag Level A Certification | ✓ | ✓ | ✓ |
| Toxic Material Reduction | NA | NA | ✓ |
| Sound Reducing Surfaces 25mm + 50mm | NA | NA | ✓ |

HOW TO SPECIFY

| | |
|-----------------|---|
| DESIGN | Ecoustic® Loop |
| PRODUCT | Panel (Single Side) or 12mm Screen* (Double Side) |
| PANEL THICKNESS | 8mm, 13.5mm*, 25mm* or 50mm* *minimums apply |
| COLOUR | Select from Loop colours |
| EDGING | Optional extra - order separately |

The sound absorption has been tested in accordance with AS/ISO 354. For complete test reports please contact your local distributor.

