

Ecooustic® Curve

—
An acoustic vertical substrate with a Velcro®
receptive surface ideal for curved walls + ceilings



Ecoustic® Curve Colours

ecoustic®



Steel



Chrome



Quarry



Titanium




Harbour



Deep



Flint



Violet



Mango



Zest



Wine




Russet




Herb



Lotus



Glade




Onyx



Alpaca




Putty



Eclipse

All Ecoustic® Curve colours are available with a white sound-absorbing core
Product may vary in colour due to the nature of the media
Please refer to website for current colour range

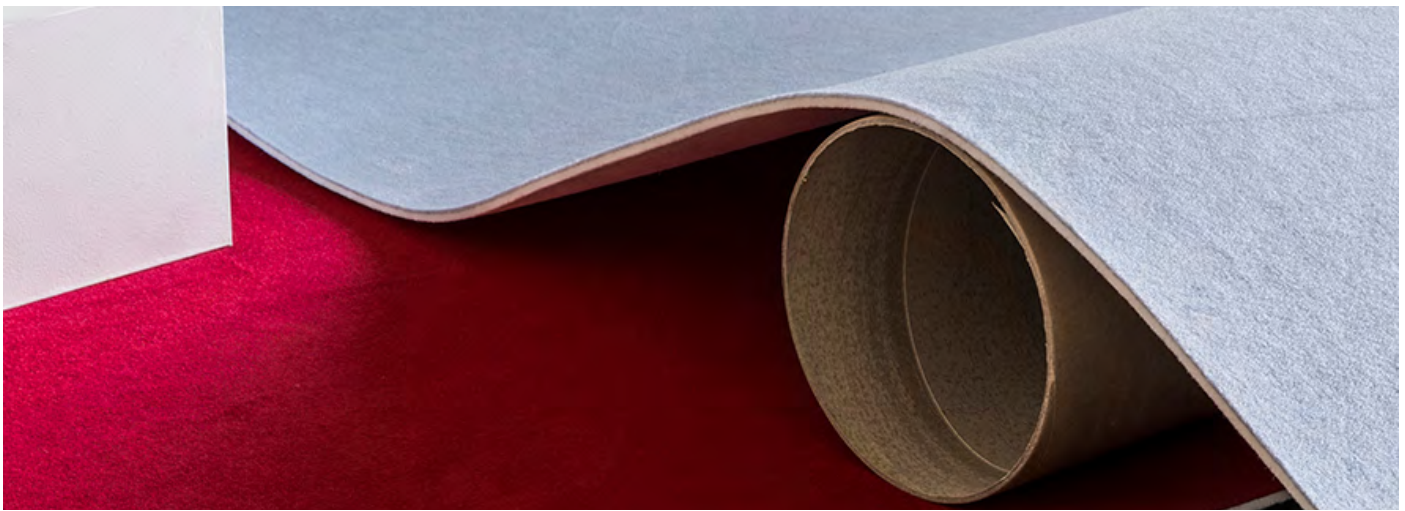

| | |
|------------------------------------|---|
| DESCRIPTION | An acoustic vertical substrate with a hook + loop receptive surface |
| COMPOSITION | 100% PET (up to 60% recycled PET) |
| THICKNESS | 10mm approx. |
| ROLL SIZE | 12m or 25m approx. |
| WIDTH | 1200mm approx. |
| LIGHTFASTNESS ISO 105-B02 | > 7 |
| LUMINOUS REFLECTANCE ASTM E1477 | Please refer to test results for specific colours |
| FIRE RATINGS AS/ISO 9705 | NCC BCA Group 1 SMOGRA <100m2/s2 x 1000 NZBC Group 1-S |
| ASTM E84 | Class B |
| ACOUSTIC | NRC 0.4 Direct Fix |
| APPLICATION | wall + ceiling (adhesive + mechanical fastening required for ceilings) |
| IMPORTANT | Ecoustic® Curve has a directional nap, therefore the orientation of the nap must be consistent throughout an installation to avoid reflectance variation It is recommended to install Ecoustic® Curve vertically |
| PLEASE NOTE | Variation from batch to batch may occur Results from performance tests are guidelines only Interior products must be protected from direct heat + sunlight |
| ORIGIN | Made in Australia |
| WARRANTY | 5 year conditional warranty against manufacturing defects. This applies to internal installation only, outdoor use will void any warranty |

BENEFITS

Flexible + Versatile Substrate: Available in roll format, Curve is ideal for walls with high ceilings as joins are virtually seamless. The flexible Curve can be used on straight and curved surfaces.

Hook + Loop (Velcro®) Receptive Surface: Ecoustic® Curve has a pin, staple and hook + loop receptive surface that is ideal for educational institutions such as primary + high schools, universities, child care centres and libraries.

Designed for the Environment

- Based on low energy manufacturing
- 100% polyester (>60% PC + PI recycled content)
- Designed for disassembly + recyclable
- Low-VOC, EPD + Greentag Level A Certified

Building Rating Systems: Curve will contribute the following points for Green Star, LEED + WELL building standards.

| Criteria | Green Star | LEED | WELL |
|--|------------|------|------|
| Recycled Content | √ | √ | NA |
| Low VOC | √ | √ | √ |
| Recycling Program | √ | √ | NA |
| EPD | √ | √ | NA |
| Third Party Greentag Level A Certification | √ | √ | √ |
| Declare | NA | √ | √ |
| Toxic Material Reduction | NA | NA | √ |

HOW TO SPECIFY

| | |
|--------|--------------------------------------|
| DESIGN | Ecoustic® Curve |
| COLOUR | Select from Ecoustic® Velour colours |