



<b>COMPOSITION</b>	100% phthalate-free vinyl, Osnapburg backing
<b>WIDTH</b>	132cm (trimmed) approx
<b>WEIGHT</b>	453gsm approx
<b>PATTERN REPEAT</b>	non-match
<b>ROLL SIZE</b>	45.8m approx. Note: minimum order quantity is 10.9m and 0.9m multiples
<b>PERFORMANCE</b>	Type II Wallcovering Easy to clean Bleach cleanable
<b>Additional Fire Tests</b>	AS/NZS 3837 (AS 5637.1) Group 1 ASTM E-84 (adhered) Tunnel Test Class A

### ENVIRONMENT


- Low VOC certified
- All wallcoverings meet the stringent criteria of the Collaborative for High Performance Schools (CHPS Section 01350)
- Free of formaldehyde, phthalates + heavy metals for healthy indoor environment

### WARRANTY

- For a period of 3 years from date of invoice this wallcovering is guaranteed to be first quality and free of manufacturing defects. This warranty applies only to professionally applied installations according to the recommended installation instructions, and proper care and maintenance using appropriate cleaning agents as outlined in the care and maintenance instructions.

### MOULD + MILDEW

- This product is intended for use in properly built and maintained buildings that are not subject to moisture accumulation in a wall or wall cavity at any time. Application must follow current installaton guidelines.




### PRODUCT INSTALLATION

Detailed installation instructions for Concertex wallcoverings are supplied with each shipment and should be referred to before cutting or installing this wallcovering.

### CARE + MAINTENANCE

- General maintenance can be achieved with periodic dusting or vacuuming with a soft brush attachment.
- Remove ordinary dirt and smudges with a mild soap and warm water solution.
- Avoid all solvent based cleaners.
- Always test the solution on an inconspicuous portion of the wallcovering before proceeding, checking that there is no adverse effect on finish, colour or gloss.
- Care should be taken on dark colours due to the possibility of causing 'light marks'. Always use a blotting action rather than rubbing to avoid abrasion.
- Rinse lightly with clean water and sponge.
- Deeply embossed wallcoverings need extra attention in case suds or loosened dirt lodge in depressed surfaces.
- Dry with a soft lint free cloth or towel.

### COLOURWAYS

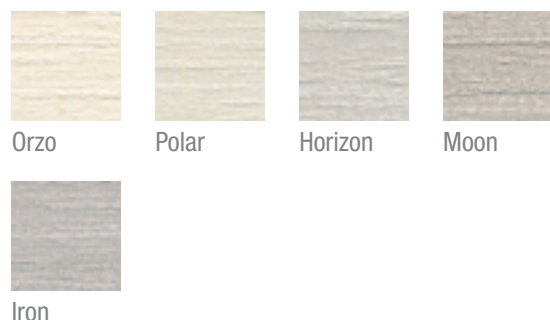

HOW TO SPECIFY	
<b>PRODUCT</b>	Aspire - Essentials
<b>COLOURWAY</b>	Select from Aspire colourways