

# Ecoustic® Raw Trimming Guidelines

- The Raw print does not extend to panel edges
- An unprinted border occurs on all four sides
- The panels need to be trimmed before installation with or without the use of edging profiles


Please adhere to the following guidelines for trimming:

- Refer to the sticker on the back of panel for the correct design orientation and keep orientation consistent
- Align a straight edge between “+” crop marks on each corner and trim horizontally and vertically
- Trimming into the print area will affect pattern continuity from panel to panel
- Do not use other print registration marks on panels as cutting guides
- Do not measure and trim a fixed amount from the panel edge as the print may not be centred within the panel
- Make all measurements and cuts based on the print area
- Approximate dimensions are below for full print size

Please Note:

- Raw is designed to be a continuous design when trimmed to print edge, however panelling will still occur at panel joins
- Always check panels side by side for correct orientation and pattern alignment prior to cutting and installing
- Raw is hand screen printed, batch to batch colour variation can occur

## Panel

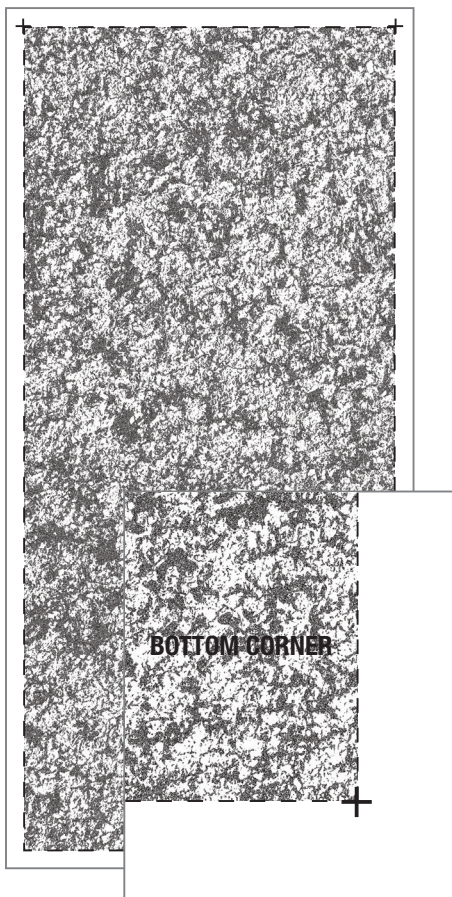

Panel Thickness: 8mm, 13.5mm, 25mm + 50mm

Panel Size: 1210 x 2720mm / 3'11" x 8'11" approx.

Print Size: 1200 x 2700mm / 3'11" x 8'10" approx.

+ Printed crop marks

----- Indication of trim line