
Ecoustic® Felt

A marle acoustic felt textile available in a wide range of colours



Colours

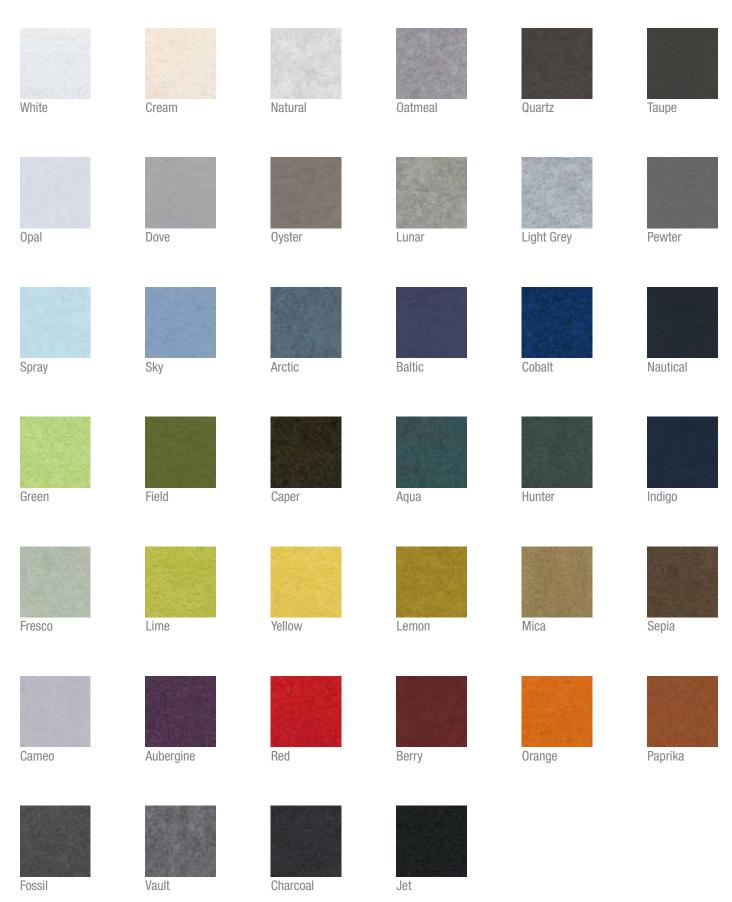

Ecoustic® Felt Textile



COMPOSITION

100% PET (up to 80% recycled PET)

THICKNESS

1mm

> 6

WEIGHT

350gsm (+/- 10%)

WIDTH / ROLL SIZE

135cm / 50m

LIGHTFASTNESS

ISO 105-B02

FIRE RATINGS

AS/NZS 1530.3

Ignitability 8
Spread of Flame 0
Heat Evolved 1
Smoke Developed 4

AS/ISO 9705

BCA Group 1 SMOGRA <100

NZBC Group 1-S

ACOUSTIC

AS 1935.1 1998

NRC 0.04

APPLICATION

Screen, wall + ceiling panels

PLEASE NOTE

Variation in thickness, fibre mix and colour as well as flecks and other slight surface blemishes are an inherent feature of this product and are unavoidable. Variation from batch to

batch may occur

Results from performance tests are

guidelines only

Interior products must be protected

from direct heat + sunlight

WARRANTY

5 year conditional warranty against manufacturing defects. This applies to internal installation only, outdoor use

will void any warranty

ORIGIN

Made in Australia

BENEFITS

Designed for the Environment













Building Rating Systems: Ecoustic® Felt will contribute the following points for Green Star, LEED + WELL building standards.

Criteria	Green Star	LEED	WELL
Recycled Content	√	√	NA
Low VOC	√	√	√
Recycling Program	√	√	NA
EPD	√	√	NA
Declare Label	NA	√	√
Greentag Level A Certification	√	√	√
Toxic Material Reduction	NA	NA	1

HOW TO SPECIFY	
PRODUCT	Ecoustic® Felt Textile
COLOUR	Select from Ecoustic® Felt colours

