



# Ecooustic® Axis

—  
An acoustic panel with an elegant  
large-scale linear design



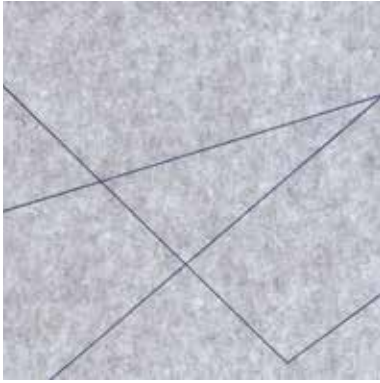

AXIS Navy on Light Grey

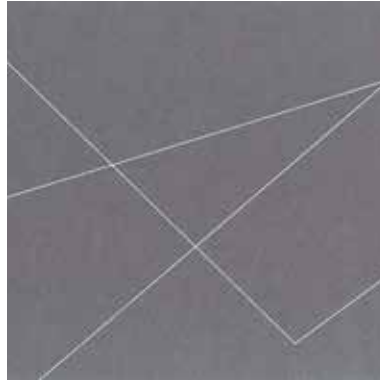

AXIS White on Pewter



AXIS Blush on Indigo




AXIS Putty on Natural



AXIS Ghost on Charcoal

Patterns shown are not to scale  
Product may vary in colour due to the nature of the media  
Please refer to website for current colour range

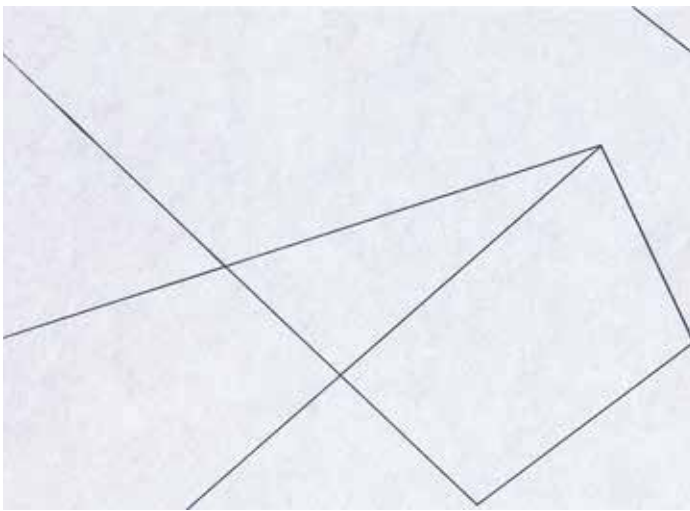

COMPOSITION	100% PET (up to 65% recycled PET)
THICKNESS	8mm (stock), 13.5mm*, 25mm*, 50mm* + 12mm Screen*
PRINT DIMENSIONS	Panel: 1200 x 2700mm approx. Screen: 2400 x 1200mm approx.
PATTERN REPEAT	H: 1200mm V: 2700mm Axis is railroaded for Ecoustic® Screen
FIRE RATINGS	AS/NZS 1530.3 AS/ISO 9705 Group 1 GB 8624-2012 Grade B1 (8mm Panel) Refer to Ecoustic® Panel + Screen specification
ACOUSTIC AS/ISO 354	NRC 0.3 - 1.0 / αw 0.34 - 1.0 Depending on panel thickness, refer to Ecoustic® Panel + Screen information
APPLICATION	Screen, wall + ceiling panel
ORIGIN	Made in Australia
EDGING	Natural anodised aluminium edging are available for all Ecoustic® Panel thicknesses + T Trims in natural anodised or black powdercoat
PLEASE NOTE	Results from performance tests are guidelines only Onsite trimming to square each individual panel is essential This is a hand printed product. Variation in thickness, fibre mix and colour as well as flecks + other slight surface blemishes are an inherent feature of this product and are unavoidable. Variation from batch to batch may occur Interior products must be protected from direct heat + sunlight
WARRANTY	5 year conditional warranty against manufacturing defects. This applies to internal installation only, outdoor use will void any warranty

**BENEFITS**

**Improved Pinability:** Ecoustic® Panel + Screen features an improved pinability compared to similar panel products.

**Lightweight, Easy to Handle + Install:** Ecoustic® is an intelligent alternative to traditional panels composed of multiple materials such as particle board, fabric, foam and adhesive.

**Designed for the Environment**



**Building Rating Systems:** Ecoustic® Axis will contribute the following points for Green Star, LEED + WELL building standards.

Criteria	Green Star	LEED	WELL
Recycled Content	√	√	NA
Low VOC	√	√	√
Recycling Program	√	√	NA
EPD	√	√	NA
Declare Label	NA	√	NA
Greentag Level A Certification	√	√	√
Toxic Material Reduction	NA	NA	√
Sound Reducing Surfaces 25mm + 50mm	NA	NA	√

**HOW TO SPECIFY**

DESIGN	Ecoustic® Axis
PRODUCT	Panel (Single Side) or 12mm Screen* (Double Side)
PANEL THICKNESS	8mm, 13.5mm*, 25mm* or 50mm* *minimums apply
COLOUR	Select from Axis colours
EDGING	Optional extra - order separately

The sound absorption has been tested in accordance with AS/ISO 354. For complete test reports please contact your local distributor.

